

POWERSUPPLIES



DR-15, Switching powersupply, 15W

- DIN-rail mounting
- No load power consumption <math><0.5W</math>
- LED indicator for power on
- Adjustable output voltage
- 3 years warranty

Technical data:


Input:

Input voltage:	85-264VAC / 120-370VDC
Frequency:	47-63 Hz
Input current at 230VAC:	0.48A
Inrush current at 230VAC:	65A

Output:

Output voltage:	See below table
Output current:	See below table
Adjustable output voltage:	+/- 10%
Overload protection:	105%-160% constant current limiting, auto-recovery
Over voltage protection:	115%-135% rated output voltage
Line regulation 85-264V:	+/-1%
Load regulation 0-100% load:	+/-1%
Ripple & noise:	80-150mVp-p depending of model
Efficiency:	79-85% depending of model
Temperature range:	-20°C...+50°C@100%, +60°C@80%
Connection:	Screw terminals
Size:	25x93x56mm
Weight:	100g
Safety and EMC:	UL/TÜV/CE/CB

Mechanical drawing:

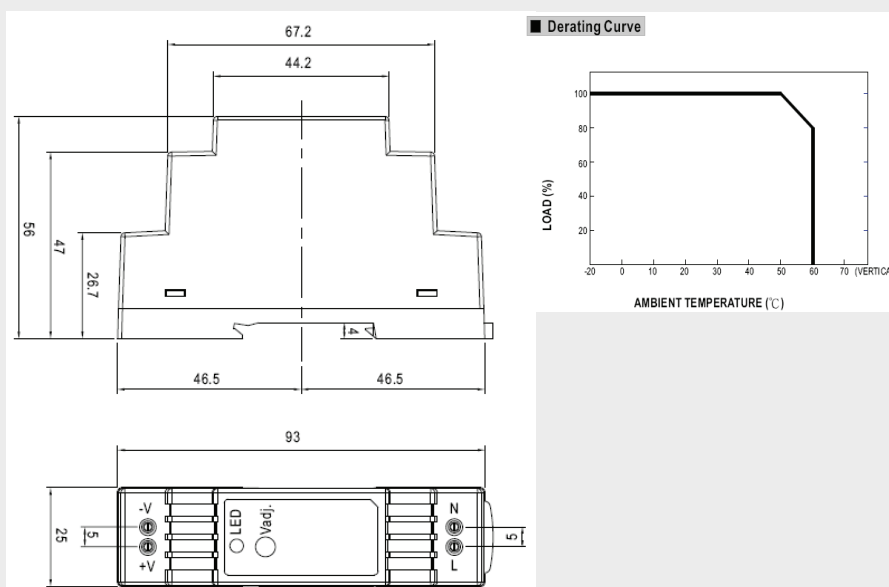

Ordering information:

Type	Power	Output voltage	Output current
DR-15-5	12 W	5VDC	2.4 A
DR-15-12	15 W	12VDC	1.25 A
DR-15-15	15 W	15VDC	1.0 A
DR-15-24	15.2 W	24VDC	0.63 A