

POWERSUPPLIES



DR-45, Switching powersupply, 45W

- DIN-rail mounting, TS35
- LED indicator for power on
- Wide input voltage range
- International safety approvals
- UL 508 listed

Technical data:


Input:

Input voltage:	85-264VAC / 120-370VDC
Frequency:	47-63 Hz
Input current at 230VAC:	0.75A
Inrush current at 230VAC:	56A

Output:

Output voltage:	See below table
Output current:	See below table
Adjustable output voltage:	+/-10%
Overload protection:	105%-150% constant current limiting, auto-recovery
Over voltage protection:	115%-135% rated output voltage
Line regulation 90-264V:	+/-1%
Load regulation 0-100% load:	+/-1%
Ripple & noise:	100-480mV depending of model
Efficiency:	72-80% depending of model
Temperature range:	-10°C...+45°C@100%, +50°C@80%
Connection:	Screw terminals
Size:	93x78x67 mm
Weight:	310g
Safety and EMC:	UL/cUL/TÜV/CE/CB

Mechanical drawing:

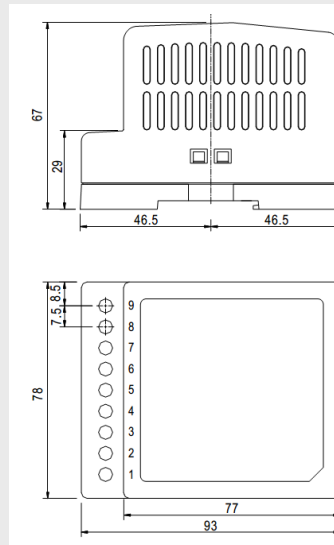

Ordering information:

Type	Power	Output voltage	Output current
DR-4505	45W	5VDC	5.0A
DR-4512	45W	12VDC	3.5A
DR-4515	45W	15VDC	2.8A
DR-4524	45W	24VDC	2.0A