

POWERSUPPLIES



DRH-120, Switching powersupply, 120W

- DIN-rail mounting, TS35 / 7.5 / 15
- LED indicator for power on
- Adjustable output voltage
- 3 years warranty

Technical data:


Input:

Input voltage: 340-550VAC, single phase
 Frequency: 47-63 Hz
 Input current at 400VAC: 0.6A
 Inrush current: 50A

Output:

Output voltage: See below table
 Output current: See below table
 Adjustable output voltage: +10%
 Overload protection: 105%-160% constant current limiting, auto-recovery
 Over voltage protection: 24VDC: 30-36VDC, 48VDC: 59-66VDC
 Line regulation: +/-0.5%
 Load regulation 0-100% load: +/-0.5%
 Ripple & noise: 80-100mV
 Efficiency: 85-86%
 Temperature range: -20°C...+60°C
 Connection: Screw terminals
 Size: 100x65.5x125.2 mm
 Weight: 790g
 Safety and EMC: CE/CB

Mechanical drawing:

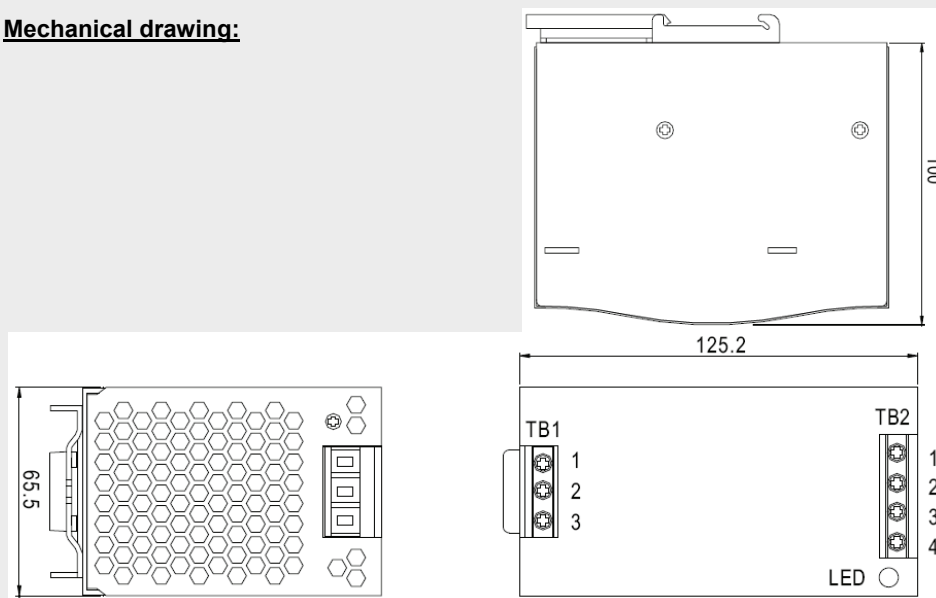

Ordering information:

Type	Power	Output voltage	Output current
DRH-120-24	120W	24VDC	5A
DRH-120-48	120W	48VDC	2.5A